

ARGENT SR225331 FLOW MINIMALIST SHOWER 9LPM

NOTES PRIOR TO INSTALLATION

1. INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
2. ANY SUSPECTED DEFECT SHOULD BE REPORTED AS SOON AS POSSIBLE
3. SHOULD ANY PRODUCT BE INSTALLED DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

PRESSURE AND TEMPERATURE REQUIREMENTS



1. Inlet pressure range 100 – 500kpa
2. Maximum hot water temperature 60 C
3. AS/NZS 3500 requires 500 kPa maximum operating pressure at any outlet within a building

COMPONENT CHECK LIST

1. Shower rail with slide and wall mount bracket
2. Three function handpiece
3. 1500mm gloss Silverflow Shower hose
4. Bag of fittings, screws and wall plugs

INSTALLATION

1. Attach shower top adaptor bracket to water entry point
2. Mark and measure adjustable bottom wall bracket location
3. Secure the bottom wall mount bracket to the wall
4. Secure the shower rail onto the wall mount brackets and fasten the grub screws
5. Connect the handpiece and hose to the shower
6. Clean any packaging or installation debris from the site

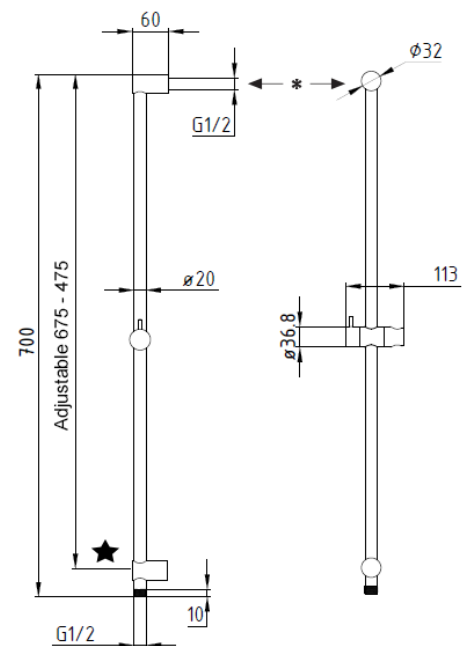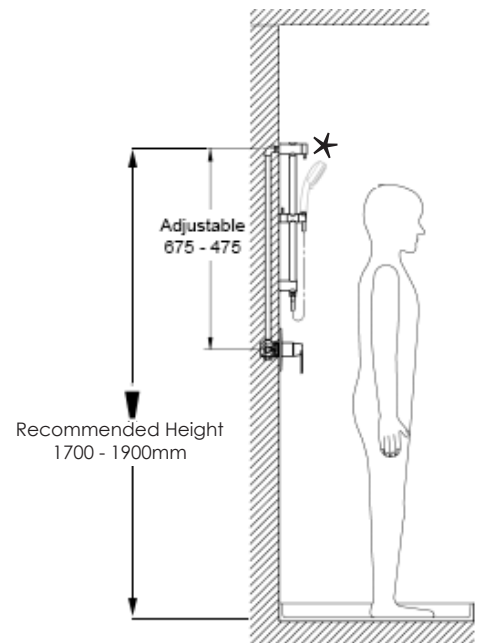

★ Bottom bracket is adjustable by 200mm - Ideal for easy installation

***Water Entry Point:** Recommended installation height is between 1700-1900mm from the finished shower floor.



Please direct any feedback for this product to
Customer Central:
support@customer-central.com.au
or call 1300 364 748